


IMPERSEAL 7000

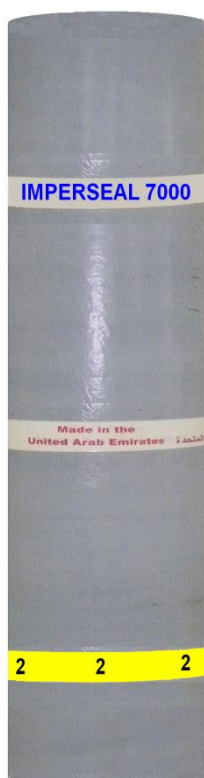

IMPERSEAL 7000 membranes are factory fabricated waterproof sheets of predetermined thickness of 1.8 & 2mm. These sheets, also known as membranes, are produced by coating a robust rot proof core, with an impervious elastomer modified bituminous compound. The compound is homogenous and highly flexible with rubber like characteristics. These are all important factors necessary for the membrane to function in a constantly wet environment. These are designed to provide roof & sub-structure concrete surfaces with high waterproofing protection.

SALIENT FEATURES

IMPERSEAL 7000 HDPE/SRF

- Strong spun bond polyester core for superior mechanical properties.
- Unaffected by corrosive salts and dilute acids formed in ground water.
- Self-sealing to minor puncture caused by sharp objects.
- SBS modified elastomeric bituminous mix exhibits excellent elongation and recovery properties.

USES

- Substructure waterproofing to areas subject to stress and movement.
- Tanking Water reservoirs and other liquid retaining, or liquid excluding, structures.
- Floor waterproofing under tiles or screeds in buildings, commercial & industrial complexes.
- Fast cold application on a primed substrate.
- **Imperseal 7000 SRF** can be used as double sided tape.

QUALITY ASSURANCE & MATERIAL WARRANTY

Imperbit Membrane Industries' Management system is registered to ISO 9001 standards.

SURFACE FINISH

IMPERSEAL 7000 HDPE: The upper surface of **IMPERSEAL 7000** comes with IMI design black printed HDPE film along with 10cm wide strip of siliconized release film for bitumen to bitumen contact at side seams.

IMPERSEAL 7000 SRF are also manufactured with both side self adhesive for specific application requirement.

TOOLS FOR FIXING

Knife, Measuring tape, Roller, Marking aids and Gloves

APPLICATION METHOD

Surface Preparation: Care should be taken that surfaces to be waterproofed are completely clean, totally dry, smooth, level and free from loose material. Any sharp protrusions such as nails, tying wire, etc. must be removed and cracks, holes, spilled and damaged surfaces filled and repaired. All external corners must be chamfered.

Priming: All vertical and horizontal surfaces must be coated with IMI Concrete Primer applied with a brush or roller at 200-300 gr/m² depending on the porosity of the surface, and allowed to dry completely.

Membrane Application: **IMPERSEAL 7000** membranes are applied by positioning the roll over the area to be waterproofed and peeling the siliconized release film about one meter at a time, while pressing the adhesive surface to the primed substrate. The membrane is pressed from mid point to the edges in order to expel any trapped air and to ensure good contact. The adjacent roll is then positioned so as to overlap the fixed membrane by at least 100-mm along the edge. The selvage strip provided at the edge of the fixed membrane is then peeled back one meter at a time while fixing the second roll in the same manner as the first. End laps must be min 150-mm wide. All seams must be pressed from the top using a heavy seam roller to ensure total contact and continuity at the seams. Inspect the fixed membrane to ascertain that all joints are properly executed and all air is expelled from under the membrane.

Corners and Termination: Use fillets or cant strips at all internal corners and chamfer external corners before applying the membrane. Apply a 600-mm wide reinforcing strip of **Imperseal 7000** over the corners followed by the full membrane. Top edges of the membrane should be terminated in a chase on vertical surfaces, followed by a suitable bituminous mastic sealant.

Protection: Once laid, the membrane must be protected from long-term exposure, construction abuse and backfill, within 24 hours. On vertical areas the use of IMI Protectar protection boards is recommended. On horizontal surfaces a minimum 25-mm thick sand-cement screed may be used.

PROPERTIES		7000 HDPE/SRF	METHOD OF TESTING
Reinforcing Core GSM		200 non-woven polyester	UEAtc MOAT: 31 Para F
Nominal Thickness (mm)		1.8 & 2.0	UEAtc, ASTM D 751
Tensile Strength (Composite) N/5cm	Longitudinal	700	UEAtc
	Transversal	500	
Tensile Strength (Polyester Reinforcement) N/mm ² (N)	Longitudinal	11 (>55)	ASTM D 638/ D 412
	Transversal	9 (>44)	
Elongation (Composite) %	Longitudinal	45	UEAtc
	Transversal	50	
Elongation (HDPE Surfacing Film) %	Longitudinal	300	ASTM D 638
	Transversal	300	
Tear Strength Notch Method (Composite) N	Longitudinal	380	ASTM D 5147
	Transversal	300	
Tear Resistance (Polyester Reinforcement) N/mm	Longitudinal	>117	ASTM D 1004
	Transversal	>126	
Elongation of Rubber-bitumen %		>1500	ASTM D 412
Puncture Resistance N/mm		700/45	ASTM E 154
Resistance to Hydrostatic Pressure m (bar)		74 (7)	DIN 1048, ASTM D 5385
Flexibility at low temperature (Composite) °C		< -20	UEAtc, ASTM D 5147
Softening Point °C		100-110	ASTM D 36
Adhesion Strength	To primed concrete & self N/mm	2.0	ASTM D 1000
Water Vapour Transmission (Composite) gr/m ² / 24 hrs		< 0.06	ASTM E 96
Chemical Resistance		Conforms	ASTM D 543
Water Absorption %	@ 24 hrs.	0.15	ASTM D 570
	@ 30 days	0.95	
Capacity to Bridge Cracks (Composite) mm		Will withstand substrate cracking > 1 width	ASTM C 836
Service Temperature (Composite) °C		7- 45	

HANDLING PRECAUTIONS: IMPERSEAL 7000 membranes have no health hazard when used with our standard application recommendations. IMI CONCRETE primer contains a flammable solvent with flash point of 42°C. Use primer in well ventilated areas away from sources of direct heat or ignition. Inhalation must be avoided and the use of protective clothing, rubber gloves, goggles and barrier cream is recommended. Do not use solvent to clean skin. After work clean hands with soap and warm water or suitable mild detergent. Obtain immediate medical advice if redness or skin irritation appears. In case of mouth or eye contact, flush immediately with fresh water and seek medical advice.

STORAGE: IMPERSEAL 7000 rolls are shipped upright on wooden pallets. The roll must be kept upright at all times. Storage of Imperseal rolls should be in a well-ventilated and covered storage area. Membranes should be stored away from a source of direct heat. If ambient temperatures at storage site fall below 10°C, the rolls should be exposed to warmer temperatures of 10°C to 40°C for periods of upto 2 hours prior to use to facilitate ease of application and good bond to the substrate. Do not stack more than 1 high. **IMPERSEAL 7000** has a shelf life of 12 months from date of production, if stored in a cool, dry store in original unopened packing.

Indicative Loading Capacity for 1.8 & 2.0mm thickness:
550 Rolls per 40 ft Trailer / 522 Rolls per 20 ft Container.

PACKING: IMPERSEAL 7000 membranes are palletised and shrink-wrapped at the factory.

Product Name	IMPERSEAL 7000 HDPE/SRF	
Thickness (mm)	1.8	2.0
Rolls per pallet (Nos.)	25	25
Nominal Roll Length (mtrs)	15	15
Nominal Roll weight (kgs)	30	33

The technical data given here are the average results of tests carried out in our laboratory on the **IMPERSEAL 7000** membrane. IMI reserves the right to change or modify the data without prior notice. All reasonable care has been taken in compiling the data that to the best of our knowledge is accurate and true. All recommendations are made in good faith. **IMPERSEAL 7000** membranes are warranted to be free from manufacturing defects for a period of 10 years. No responsibility can be accepted by us and no warranty is implied with regard to any of the recommendations made in this data sheet, since the conditions of actual use and the labour involved are beyond our control. **IMPERSEAL 7000** membranes are not affected by chlorides, sulphates & phosphates as well as dilute acids found in ground water.

IMPERBIT MEMBRANE INDUSTRIES L.L.C.

P O BOX 33150, DUBAI, U.A.E.

TEL : (+9714) 880 1616

FAX: (+9714) 880 1661

E-MAIL : imperbit@alyousuf.com

FACTORY: KM 3, JEBEL ALI - HATTA HIGHWAY, JEBEL ALI INDUSTRIAL 3.

