


BRIDGE-GUARD SBS

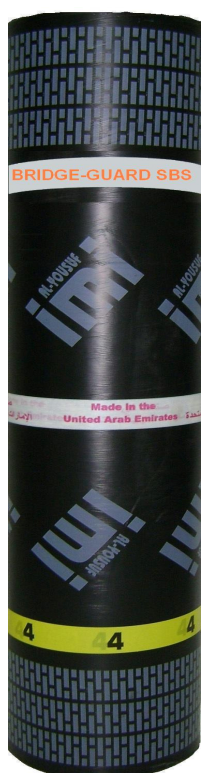

BRIDGE-GUARD SBS is high performance SBS modified bitumen, double reinforced waterproofing membrane for the protection of concrete bridge decks. The membrane withstands high thermal shock and creates a homogeneous layer with the paving asphalt.

SALIENT FEATURES

- Industrial Grade product, heavy-duty application.
- Special formulation for bridge deck applications.
- Excellent resistance to puncture.
- Robust construction and high tensile strength.
- Superior tolerance to thermal shock.
- Dimensional Stability

DESCRIPTION

BRIDGE-GUARD SBS membranes are made by saturating and coating reinforcements of spun bond non-woven polyester and glass fibre tissue with a homogeneous thermoplastic blend of SBS (styrene-butadiene-styrene), distilled bitumen and stabilizers. The mixture is carefully produced under controlled conditions to ensure its stability at high temperatures and its flexibility at lower temperatures.

BRIDGE-GUARD SBS membranes are impermeable to water, and are specially formulated to withstand high thermal shock.

QUALITY ASSURANCE & MATERIAL WARRANTY

Imperbit Membrane Industries' Management system is registered to ISO 9001 standards & all **BRIDGE-GUARD SBS** membranes carry a 10 year material warranty. In addition to stringent regular test by IMI laboratory, are products are also periodically by independent laboratories.

STANDARDS

BRIDGE-GUARD SBS membranes conform to the requirements of ASTM D 6162 Type I & Type II. UEAtc MOAT 27 – 1983 & MOAT 31-1984.

DOUBLE REINFORCEMENTS

Double reinforced membranes for waterproofing of large decks where dimensional stability of the membrane is important. The combination of polyester and fiberglass mat reinforcement ensures superior shape and dimensional stability under severe cyclic conditions.

SURFACE FINISH

The top surface of the membrane is finished with PE film with IMI Logo, fine sand. The bottom surface is covered with a thin layer of printed PE film with IMI design. For exposed application the top surface is covered with a layer of natural slate flakes to protect the membrane from UV rays. The slate flakes are also available in attractive colours on request. The 1 meter wide membranes are produced in thickness of 4 and 5 mm and in a standard length of 10 meters.

USES

BRIDGE-GUARD SBS membranes are specially produced for heavy-duty applications such as protection of bridge decks, multi-storey car parks and other applications that demand a dimensionally stable membrane with high impact resistant and overall toughness.

PAVING ASPHALT

Hot paving asphalt or asphaltic concrete may be laid by a paving machine† directly on **BRIDGE-GUARD SBS** membranes.

TOOLS FOR FIXING THE MEMBRANE

Gas torch for welding & related cylinder, knife for trimming the membrane, a trowel with a rounded tip, marking aids and gloves.

APPLICATION

The surface to be waterproofed must be completely cleaned and should be free of dust, oil, protruding nibs, nails etc. A coat of IMI CONCRETE primer is then applied to the concrete surface at the rate of 200-300 gr/m². The primer must be allowed to dry completely before application of the membrane. **BRIDGE-GUARD SBS** membranes are fixed by torch welding. The membrane rolls are lined up and spread open parallel to bridge length or over the area to which they are to be fixed. The rolls are laid so that they overlap each other by at least 10cms along the side lap, lap-joints should shed water towards drains. The membranes are then rolled back without changing the given orientation. They are then unrolled once again while heating the underside sufficiently to cause surface melting. End laps should be a minimum 15 cms. Avoid excessive and uneven application of heat. The lap joints should be heated from the top to produce a thin bead of molten bitumen at the seam; the bead is then smoothed out with the trowel, ensuring a properly welded joint.

MECHANICAL/CONSTRUCTION EXPANSION JOINTS: Follow Expansion Joint Manufacturer's recommendation for incorporating membranes into the system.

† Mechanical pavers with rubber wheels only.

‡ TECHNICAL DATA FOR BRIDGE-GUARD SBS



Properties		Typical Values	Method of Testing
Reinforcement Core		230 gr/m ² Spun bond non woven polyester & 60 gr/m ² glass fiber tissue	UEAtc, MOAT: 31 Para F
Nominal thickness of membrane		4 & 5 mm	UEAtc, ASTM D 5147
Tensile Strength N/5cm	Longitudinal	1000	UEAtc
	Transversal	750	
Tensile Strength kN/M	Longitudinal	17	ASTM D 5147
	Transversal	13	
Elongation, %	Longitudinal	40	UEAtc, ASTM D 5147
	Transversal	42	
Tear Strength, N (Nail Method)	Longitudinal	250	UEAtc
	Transversal	300	
Tear Strength, N (Notch Method)	Longitudinal	700	ASTM D 5147
	Transversal	500	
Puncture Resistance, N		1000	ASTM E 154
Puncture Resistance	Static Indentation	L ₄	UEAtc
	Dynamic Indentation	I ₄	
Resistance to hydrostatic pressure		> 7 bar (>70M)	ASTM D 5385, DIN 1048
Flexibility at low temperature		-20 °C	UEAtc, ASTM D 5147
Dimensional Stability, L/T (%)		± 0.2	UEAtc, ASTM D 5147
Softening Point *		125 °C	UEAtc, ASTM D 36
Penetration @25 °C *		25 dmm	UEAtc, ASTM D5
Heat resistance, 102 °C		No flow.	UEAtc, ASTM D 5147
Impermeability of membrane to water		Absolute	UNI 8202

* Compound Properties (Tested during manufacturing process)

The technical data given here are the average results of tests carried out in our laboratory on the **BRIDGE-GUARD SBS** membrane. IMI reserves the right to change or modify the data without prior notice. All reasonable care has been taken in compiling the data that to the best of our knowledge is accurate and true. All recommendations are made in good faith. **BRIDGE-GUARD SBS** membranes are warranted to be free from manufacturing defects for a period of 10 years. No responsibility can be accepted by us and no warranty is implied with regard to any of the recommendations made in this data sheet, since the conditions of actual use and the labour involved are beyond our control. **BRIDGE-GUARD SBS** membranes are not affected by chlorides, sulphates & phosphates as well as dilute acids found in ground water.



Packing Configuration:

4P-PBS/SAND 23rolls per pallet

5P-PBS/SAND 16 rolls per pallet

Nominal roll length for above products = 10 mtrs

HANDLING PRECAUTIONS: BRIDGE-GUARD SBS membranes have no health hazard when used with our standard application recommendations. IMI CONCRETE primer contains a flammable solvent with flash point of 42°C. Use primer in well ventilated areas away from sources of direct heat or ignition. Inhalation must be avoided and the use of protective clothing, rubber gloves, goggles and barrier cream is recommended. Do not use solvent to clean skin. After work clean hands with soap and warm water or suitable mild detergent. Obtain immediate medical advice if redness or skin irritation appears. In case of mouth or eye contact, flush immediately with fresh water and seek medical advice.

Storage:

Rolls must be kept up right at all times, in a covered well-ventilated storage area, away from sources of direct heat. If ambient temperatures at storage site fall below 10°C, the rolls should be exposed to warmer temperatures of 10°C to 40°C for periods of upto 2 hours prior to use to facilitate unrolling of the membranes. If stacking is necessary, ensure that rigid sheet of plywood is placed between the pallets. Do not stack more than 2 high. **BRIDGE-GUARD SBS** membrane has a shelf life of 12 months from the date of production, if stored in a cool, dry store in original unopened packing.

Indicative Loading Capacity for 4mm thickness:

552 Rolls per 40 ft Trailer / 468 Rolls per 20 ft Container

Product generic name:

SBS XR-200+60-4P-PBS/SAND

SBS XR-200+60-5P-PBS/SAND

IMPERBIT MEMBRANE INDUSTRIES L.L.C.

P O BOX 33150, DUBAI, U.A.E.

TEL : (+9714) 880 1616

FAX: (+9714) 880 1661

E-MAIL : imperbit@alyousuf.com

FACTORY: KM 3, JEBEL ALI - HATTA HIGHWAY, JEBEL ALI INDUSTRIAL 3.



* This technical data sheet supersedes all previous publications pertaining to this product

BRIDGE GUARD SBS

Code: QC-DSM-06

Implementation Date: 20 April, 2011

Ed-03